


## Adjusting the doors when receiving machine

Remove 5 screws M3 at the yellow bracket.



One person A hold the door, person B remove 4 screws M6 at upper slide way and shift to right (right door) or left (left door), then tight 4 screws M6 back.

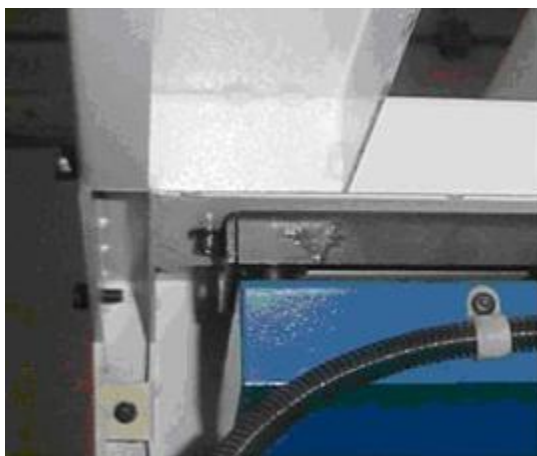

The slide way inside full enclosure when machine is shipped



After adjusting side way to right position